

MODEL NUMBER	4PP-250 TON SPECS.
Tons of force (maximum)	250
Approach speed (inches per minute)	78
Press speed (inches per minute)	27
Return speed (inches per minute)	117
Table pressing surface <b>left to right</b>	48
Table pressing surface <b>front to back</b>	36
Daylight	26
Maximum stroke (adjustable)	15
Floor to table	29.75
Front to back	46
Height (overall)	98.75
Width	96
Upper platen pressing surface <b>left to right</b>	48
Upper platen pressing surface <b>front to back</b>	36
Motor HP @ 1750 RPM	50 HP
Voltages available	230 / 460 / 575 3 PH. 60 HZ.

### 4 POST PRESS 250 TON






#### STANDARD FEATURES

- ✓ Pressure gauge.
- ✓ Pressure regulator.
- ✓ Adjustable speed control.
- ✓ Adjustable stroke control.
- ✓ Pressure reversal switch.
- ✓ Ram travel is guided by 4 precision-ground chromed rods.
- ✓ Jog mode used for simplifying setups.
- ✓ Dual Control - your choice of using:  
(1) Moveable pedestal c/w dual electric palm buttons & extra emergency stop or  
(2) Foot pedal.
- ✓ P.L.C. programmable control system.
- ✓ Quality BALDOR motor, low speed.
- ✓ Remote hydraulic power Pac with a 100 gal. oil reservoir.
- ✓ Air-Cooled industrial oil cooler.
- ✓ **All hydraulic and mechanical parts are standard** in the industry, and available throughout North America.

MODEL	WEIGHT (LBS.)	SHIPPING DIMENSIONS L x W x H
FP-250	15,200	



**4 POST PRESS 250 TON DIMENSIONS (INCHES)**

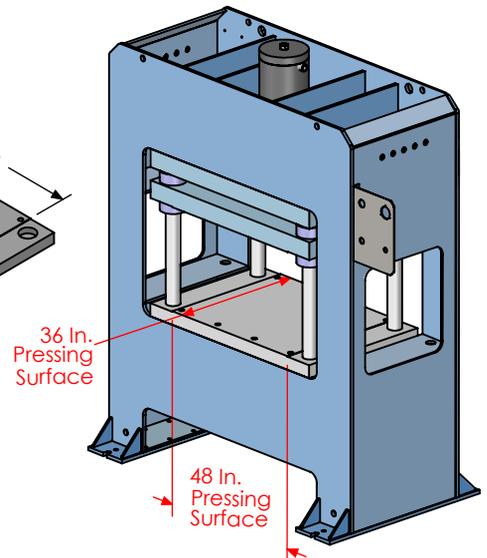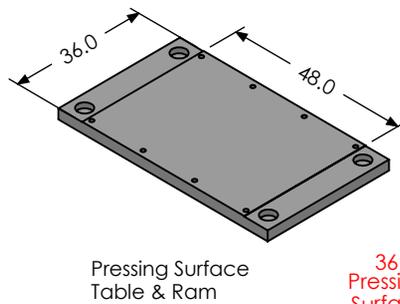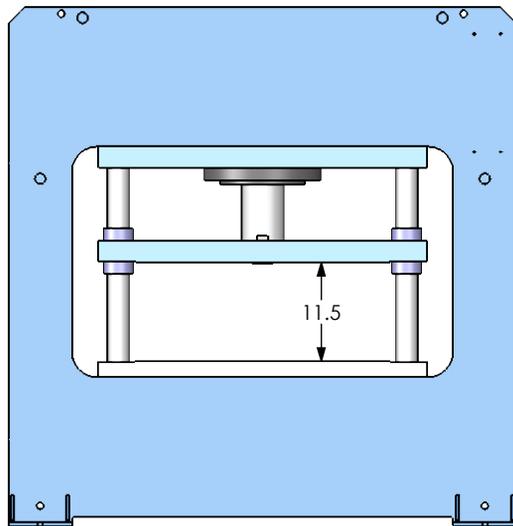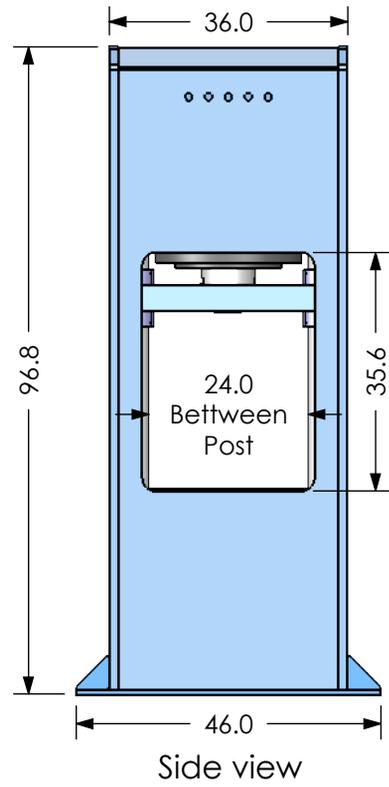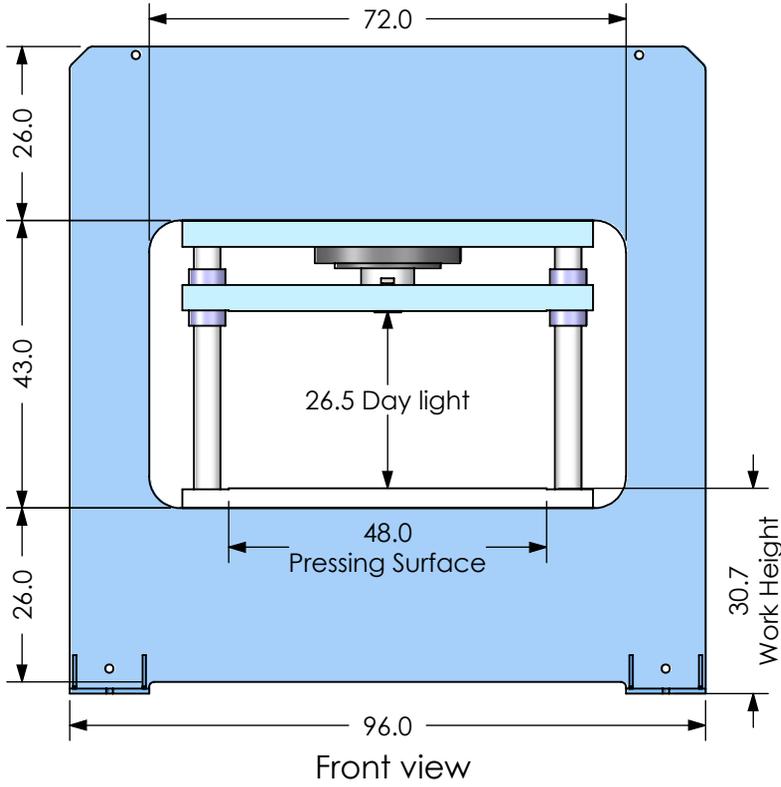

The above specification are our standard dimensions, custom dimensions are available upon request.