

MODEL CFP-12	KEY	SPECS.
Tons of force (maximum)		12
Approach speed (inches per minute)		174
Press speed (inches per minute)		33
Return speed (inches per minute)		232
Table (left to right)	A	21
Table (front to back)	B	16
U-Slot width	C	4
Daylight	D	17
Maximum stroke (adjustable)	E	12
Throat	F	11
Floor to table	G	36
Front to back	H	46
Height (overall)	I	87
Width	J	26
Clearance	K	6
Upper platen (left to right)	L	21
Upper platen (front to back)	M	16
Motor HP @ 1750 RPM		5 HP
Voltages available		230 / 460 / 575 3 PH. 60 HZ.


C FRAME PRESS 12 TON

STANDARD FEATURES

- ✓ Pressure gauge.
- ✓ Pressure regulator.
- ✓ Adjustable speed control.
- ✓ Adjustable stroke control.
- ✓ Pressure reversal switch.
- ✓ Ram travel is guided by 4 precision-ground rods.
- ✓ Jog mode used for simplifying setups.
- ✓ Dual Control - your choice of using:
 - (1) Moveable pedestal c/w dual electric palm buttons & extra emergency stop or
 - (2) Foot pedal.
- ✓ P.L.C. programmable control system.
- ✓ Quality BALDOR motor, low speed.
- ✓ **All hydraulic and mechanical parts are standard** in the industry, and available throughout North America.

OPTIONS AVAILABLE

- ✓ Air-Cooled industrial oil cooler.
- ✓ Side safety guards.
- ✓ T-Slots.

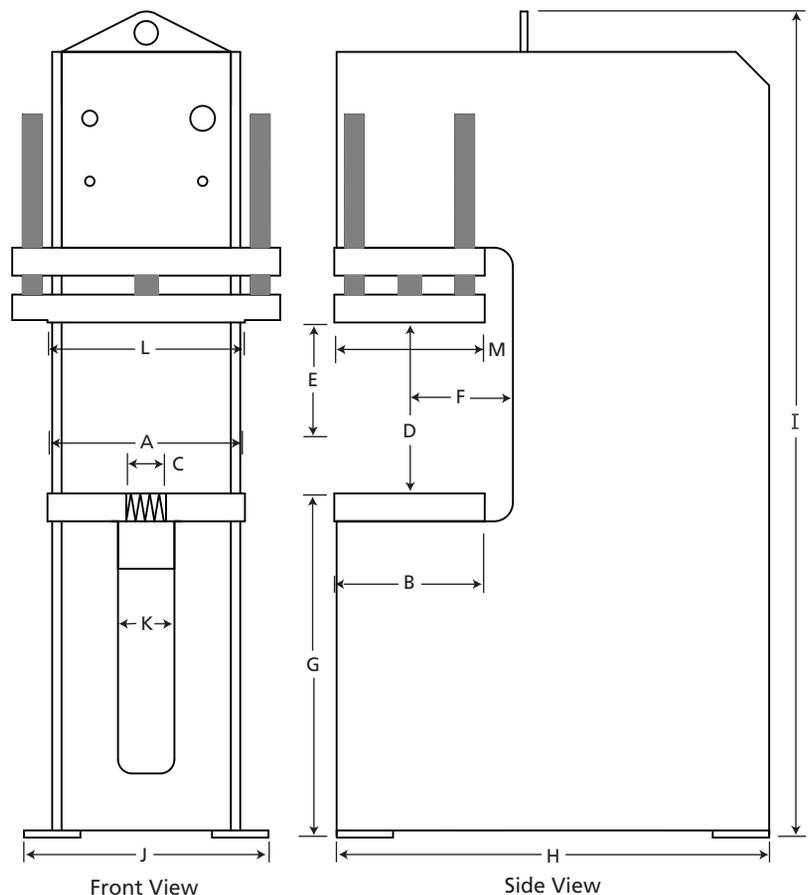

MODEL	WEIGHT (LBS.)	SHIPPING DIMENSIONS		
		L	W	H
CFP-12	3,500	54"	50"	94"